

# AT-CUT CRYSTAL UNIT (SMD • Ceramic Package)

RoHS compliant / Pb free

## CS325S


3000pcs/reel




### FEATURES

- High-density SMD type.
- Reliable ceramic package and excellent environmental characteristics.
- Suitable for various applications such as communication devices, AV devices and other equipment.

### DIMENSION [mm]

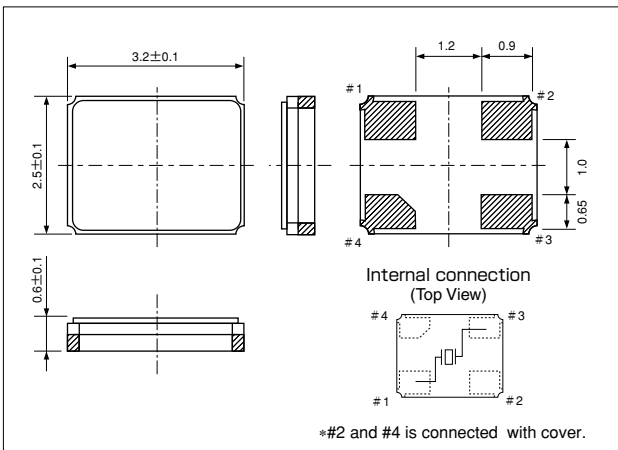

### SOLDER PAD LAYOUT [mm]

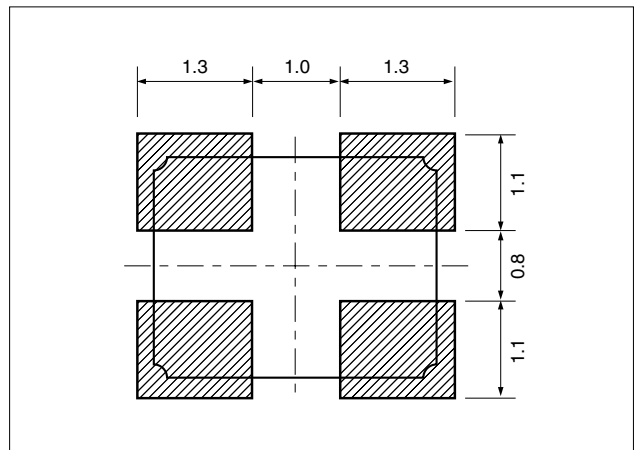

### STANDARD SPECIFICATIONS

Item	Model	CS325S	Conditions
Nominal Frequency	$f_0$	12.0MHz~54.0MHz (Fundamental)	Need to contact us for the available frequency
Frequency Tolerance	$\Delta f/f_0$	$\pm 30\text{ppm}$	at 25°C
Frequency Tolerance over Operating Temperature Range	$\Delta f/f_0$	$\pm 30\text{ppm}$	-10°C~+60°C
Operating Temperature Range	$T_{OPR}$	-40°C~+85°C	
Storage Temperature Range	$T_{STR}$	-55°C~+125°C	
Motional (series) resistance	$R_1$	Refer to the following table	at 25°C
Load capacitance	$C_L$	10.0pF~∞	Need to specify your requirement
Shunt capacitance	$C_0$	5.0pF Max.	
Level of drive	DL	10 μW (100 μW Max.)	
Insulation Resistance	$I_R$	500MΩ Min.	DC100V±15V
Aging (first year)	$\Delta f/f_0$	$\pm 5\text{ppm Max.}$	25°C±3°C

### MOTIONAL (SERIES) RESISTANCE ( $R_1$ )

Frequency Range	12.0MHz ≤ $f_0$ < 16.0MHz	16.0MHz ≤ $f_0$ < 20.0MHz	20.0MHz ≤ $f_0$ < 30.0MHz	30.0MHz ≤ $f_0$ < 54.0MHz
ESR	150 Ω Max.	120 Ω Max.	80 Ω Max.	50 Ω Max.